

QUICK ALLY SCAFFOLD

www.totalaccesssolutions.com.au




SPECIFICATIONS

- Standards: 1.0 m, 1.5 m, 2.0 m, 2.5 m, 3.0 m, 4.0 m.
- Ledgers: 0.5 m, 0.7 m, 1.2 m, 1.8 m, 2.4 m, 3.0 m.
- Polypropylene platforms:
0.7 m, 1.2 m, 1.8 m, 2.4 m, 3.0 m.
- Also available various sizes bridging beams, ladder beams, hop ups, side truss frames etc.
- Access Stairs: 1.0 m, 1.5 m, 2.0 m (both stretcher & normal available).

FEATURES

- Fully interchangeable & compatible with QuickAlly Mobile Scaffolding.
- Engineered & certified up to a 25 m (can be used higher with engineering approval).
- 50 mm x 3 mm NATA certified structural aluminum tube.
- 450 kg WLL (medium duty industrial).
- Lightweight system constructed with 30% less weight than steel.
- Compatible with the slab edge protection system.
- 500 mm centres.
- Quick to erect & dismantle.
- Ideal for all trades including painting, plastering, plumbing, maintenance and remedial work.
- Design registered & patented with Workcover Australia.
- Designed & manufactured in Australia.

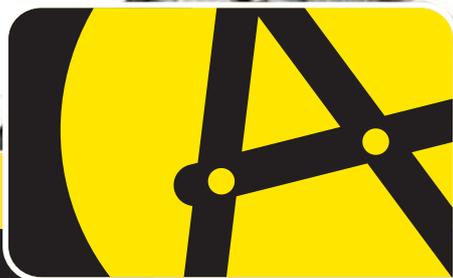

Total Access
SOLUTIONS



Telephone: **(02) 9524 6136**

Fax: **(02) 9524 9136**

Email: **info@totalaccesssolutions.com.au**

get up • get in • get on